


CUSTOM SHAPE BATTERY OPTIMIZE YOUR POWER SOURCE

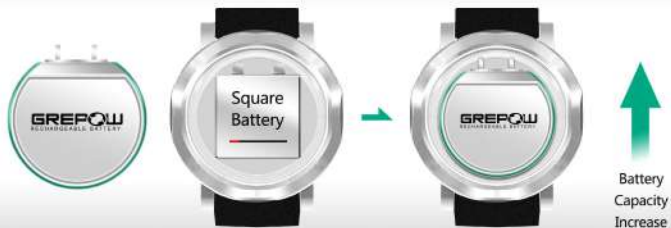

HIGH PERFORMANCE LITHIUM-POLYMER CELL

GREPOW IS ONE OF THE MAJOR SUPPLIERS OF HIGH DRAIN AND INDIVIDUAL LITHIUM POLYMER CELLS.

WE HAVE

- * Huge R&D team for fast product development
- * Automatically production line; Also keep semi-auto production line (more flexibility and lower MOQ)
- * Bar Code System & Professional monitoring of the whole production processes
- * Wide product Range
- * IN-HOUSE BMS production /IN-HOUSE case design
- * Oversea branches for customer support
- * European and USA warehouse for easy supply

CUSTOMIZED

OUR UNIQUE EXPERIENCES IN THIS AREA ENABLE US TO PROVIDE AN EXTENDED ASSORTMENT OF SHAPE BATTERIES, IT ALLOWS US AS WILL TO CUSTOMIZE BATTERIES AND FIT IT PRECISELY TO YOUR APPLICATION.

KEY FEATURES OF SHAP BATTERY

- * Increase runtime
- * Minimize the size of your device
- * Increase wearing comfort
- * Change the form factor of your device
- * Subdivide from your competitors
- * Independence of product design from regular battery forms

REFERENCE TYPES


NO.	Types	Voltage	C-Rate	Capacity	IR	Weight	Shape	Mould	Note
1	GRP2530027-11A	4.2	1C	135	≤120	3.2±0.5	Round	Yes	
2	GRP2530027-13A	4.35	1C	145	≤120	2.9±0.5	Round	Yes	
3	GRP3030027-11A	4.2	1C	170	≤110	3.6±0.5	Round	Yes	
4	GRP3030027-G2A	4.2	15C	140	≤75	3.1±0.3	Round	Yes	
5	GRP3530027-11A	4.2	1C	210	≤85	4.7±0.5	Round	Yes	
6	GRP353035-11A	4.2	1C	225	≤60	6.5±0.5	Round	Yes	
7	GRP3630027-13A	4.35	1C	225	≤85	4.1±1.0	Round	Yes	
8	GRP4730027-11A	4.35	1C	330	≤70	11.0±0.5	Round	Yes	
9	GRP5030027-R1A	4.2	3C	300	≤70	6.4±0.5	Round	Yes	
10	GRP6530027-R1A	4.35	3C	430	≤70	7.7±0.5	Round	Yes	
11	GRP3030028-11A	4.35	1C	185	≤100	3.6±0.5	Round	Yes	
12	GRP3533031-11A	4.35	1C	295	≤100	5.5±0.5	Round	Yes	
13	GRP4035030-11A	4.35	1C	360	≤70	6.7±0.5	Round	Yes	
14	GRP4035035-11A	4.35	1C	405	≤65	7.5±0.5	Round	Yes	
15	GRP6035033-13A	4.2	1C	630	≤40	12.0±0.7	Round	Yes	
16	GRP6035033-13A	4.2	1C	630	≤40	12.0±0.7	Round	Yes	
17	GRP6035033-11A	4.35	1C	650	≤40	11.5±0.7	Round	Yes	
18	GRP4435035-11A	4.2	1C	450	≤50	8.8±0.5	Round	Yes	
19	GRP4535035-11A	4.35	1C	475	≤50	8.5±0.7	Round	Yes	
20	GRP4635035-11A	4.35	1C	480	≤50	8.5±1.0	Round	Yes	
21	GRP5335035-11A	4.35	1C	560	≤45	11.0±0.5	Round	Yes	
22	GRP5435035-11A	4.4	1C	610	≤45	10.0±1.0	Round	Yes	
23	GRP5135035-11A	4.2	1C	525	≤45	9.3±1.0g	Round	Yes	
24	GRP5535035-11A	4.2	1C	580	≤36	10.5±1.0	Round	Yes	
25	GRP3337036-11A	4.35	1C	385	≤80	7.4±0.5	Round	Yes	
26	GRP4337036-11A	4.35	1C	530	≤70	9.6±0.7	Round	Yes	
27	GRP4037036-12A	4.35	1C	495	≤80	8.4±0.5	Round	Yes	
28	GRP4737036-11A	4.35	1C	580	≤60	10.5±0.7	Round	Yes	
29	GRP4835035-12A	4.35	1C	545	≤80	11.0±0.5	Round	Yes	Double folding
30	GRP4835035-11A	4.35	1C	545	≤80	11.0±0.5	Round	Yes	Single folding
31	GRP5549043-12A	5.2	1C	960	≤55	17.6±1.0	Round	Yes	
32	GRP7550040-11A	4.2	1C	1500	≤15	27.5±2.0	Round	Yes	
33	GRP5535032-12A	4.4	1C	600	≤50	10.5±1.0	Round	Yes	
34	GRP3028023-11A	4.35	1C	140	≤130	2.1±0.5g	Round	Yes	
35	GRP5811047-S2A	4.2	20C	200	≤40	4.9±0.5	Rectangle	Yes	
36	GRP6011047-G2A	4.2	15C	220	≤60	4.8±0.5	Rectangle	Yes	
37	GRP6011047-T2A	4.2	10C	230	≤40	4.9±0.5	Rectangle	Yes	
38	GRP6316040-G1A	4.2	15C	290	≤45	6.3±0.5	Rectangle	Yes	
39	GRP6516040-S2A	4.2	20C	300	≤25	6.3±0.5	Rectangle	Yes	
40	GRP6920035-G1A	4.2	15C	350	≤50	8.1±0.5	Rectangle	Yes	
41	GRP6824037-U2A	4.2	30C	450	≤13.5	11.0±1.0	Rectangle	Yes	
42	GRP7324037-G2A	4.2	15C	520	≤18	12.0±1.0	Rectangle	Yes	
43	GRP5212050-E2A	4.2	8C	250	≤60	5.4±0.5	Rectangle	Yes	
44	GRP4812050-E2A	4.2	8C	220	≤70	4.9±0.5	Rectangle	Yes	
45	GRP5212050-E2A	4.2	8C	250	≤60	5.4±0.5	Rectangle	Yes	
46	GRP4020049-12A	4.35	1C	450	≤50	7.7±0.5	Rectangle	Yes	
47	GRP2924034-11A	4.2	1C	210	≤75	3.9±0.5	Rectangle	Yes	
48	GRP6523048-12A	4.35	1C	850	≤40	14.0±1.0	Rectangle	Yes	
49	GRP3013020-X2A	4.2	40C	37	≤300	1.1±0.2	Rectangle	Yes	
50	GRP4013020-12A	4.35	1C	80	≤180	1.5±0.2	Rectangle	Yes	
51	GRP3216021-11A	4.35	1C	80	≤220	1.5±0.2	Rectangle	Yes	
52	GRP0849049-12A	4.35	1C	140	≤120	3.6±0.3	Ultrathin	Yes	
53	GRP0849049-12A	4.2	1C	135	≤150	3.6±0.3	Ultrathin	Yes	
54	GRP0449049-12A	4.35	1C	48	≤220	1.9±0.3	Ultrathin	Yes	
55	GRP2524038-T1A	4.35	10C	185	≤80	4.1±0.5	Curve	Yes	

NO.	Types	Voltage	C-Rate	Capacity	IR	Weight	Shape	Mould	Note
56	GRP3024038-E1A	4.35	8C	250	≤170	5.3±0.5	Curve	Yes	
57	GRP4024025-13A	4.35	1C	225	≤100	4.1±0.5	Curve	Yes	
58	GRP3020035-11A	4.35	1C	200	≤75	3.9±0.5	Curve	Yes	
59	GRP4127026-13A	4.35	1C	310	≤70	5.0±0.5	U type	Yes	
60	GRP4127026-N2A	4.35	1C	250	≤60	4.5±0.5	U type	Yes	
61	GRP4022020-11A	4.2	1C	120	≤125	2.5±0.5	Irregular hexagon	Yes	
62	GRP2022020-11A	4.2	1C	50	≤350	1.2±0.2	Irregular hexagon	Yes	
63	GRP3922031-12A	4.2	1C	190	≤110	3.7±0.5	Irregular hexagon	Yes	
64	GRP2410020-11A	4.35	1C	30	≤500	0.9±0.2	Moon shape	Yes	

Charge temp.: 10°C-45°C Discharge temp.: 20°C-60°C
Different forms, capacity and C-Rate are available on request, please contact the local sales for more information.



A




B




C



D



E



F